


E045S

Electronic control unit

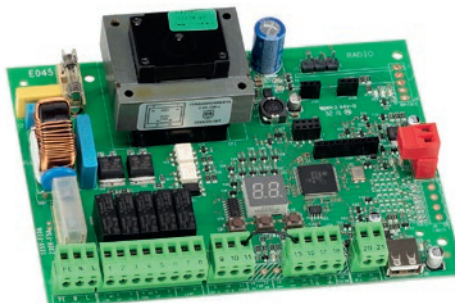

Model	Item code
-------	-----------

E045S	790077
-------	--------

The E045S control unit, code 790077, will be available after stocks of the previous board E045, code 790005, have run out.



TECHNICAL SPECIFICATIONS

Model	E045S
Power supply voltage	220-240V~ 50/60 Hz
Max. power	4W Stand by W
Motor max power	800W
Max. accessories load	500 mA 24V $\overline{---}$ - 500 mA BUS 2easy
Max. electric lock load	FAAC lock (12V~ - 24V $\overline{---}$)
Programming	LED display and buttons, via Simply Connect connectivity devices
Status signalling	Display and LED
Terminal board inputs	Open, Open pedestrian leaf, Stop (closed), BUS 2easy, Power + Earth
Terminal board outputs	Lamp, Motors, Accessories power supply 24V2 $\overline{---}$, Indicator light 24V $\overline{---}$, Electric lock power supply 12V~
Rapid connector	XF 433/868 module for OmniDEC decoding, USB-A and Simply Connect
Protection Fuses	1 (2.5A)
Operating ambient temperature	-20°C ÷ +55°C

Note: The E045S control unit can control one or two operators