



MF30



REV. 10/2022
V4.3

USER MANUAL/INSTALLER



25 meters of maximum distance



INPUT	Voltage		12Vac - 24Vac 12Vdc - 24Vdc
	Current Stand by	RX	30mA
		TX	30mA
	Rated Current	RX/TX	60mA
Frequency		50-60Hz	
Working temperature		-25°C to +70°C	
Wavelength IV		940nm	
Isolation Class		3	
Relay Output Switching Capacity		30Vdc, 1A	

OPEN THE PHOTOCELL



01 • Press the chrome part into the areas indicated on the image.





02 • Slide the chrome part.



03 • Open the photocell by separating the parts from the bottom.

INSTALL PHOTOCELL

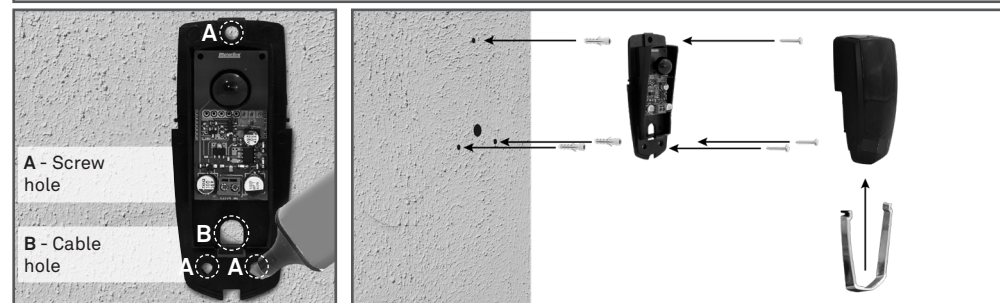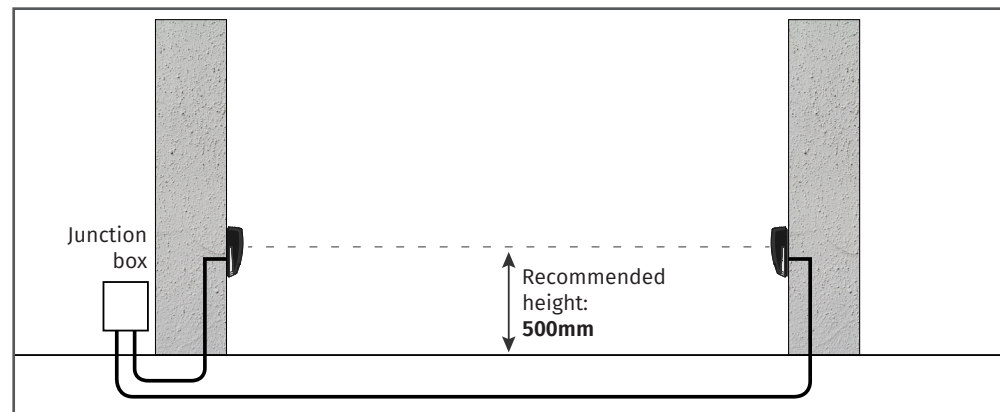

- 01** • Open the photocell as indicated in the previous topic.
- 02** • Place the photocells in the desired location for the installation, keeping them aligned.
- 03** • Make the markings on the spot.
- 04** • Make the drill holes.
- 05** • Secure the photocell with suitable bushings and screws.
- 06** • Close the cover again and put the chrome part.

CONNECTION SCHEME

