

Fast40




PLAIN-VIEW OPERATOR
FOR SWING GATES
UP TO 2.3 M (7.5 FT)
PER GATE LEAF





CAME

Technology at arm's reach.

Fast40 is suitable for gates fitted on medium to large posts. Thanks to its jointed arm, it can move swing gates measuring up to 2.3 m (7.5 ft) in length, per gate leaf.

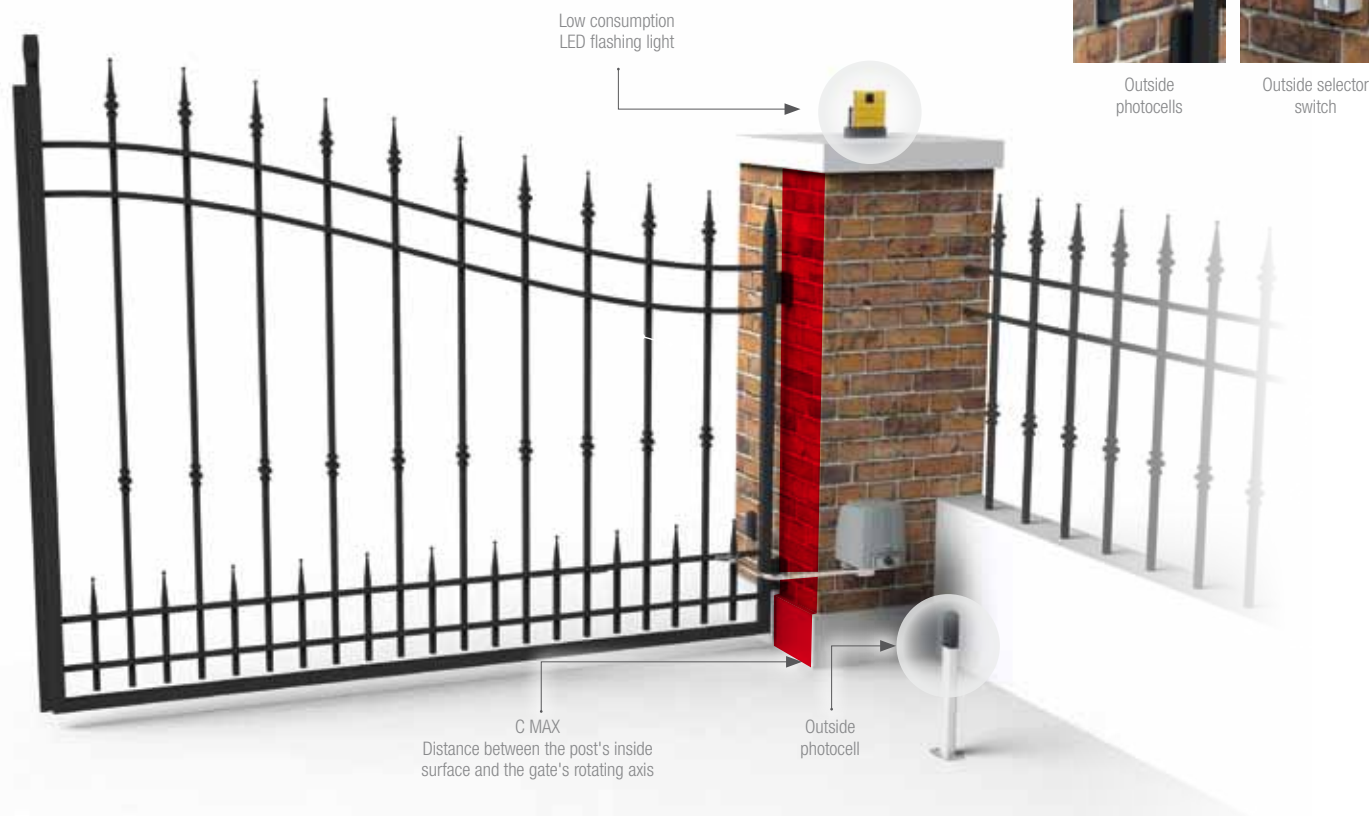

Dimensions (mm)

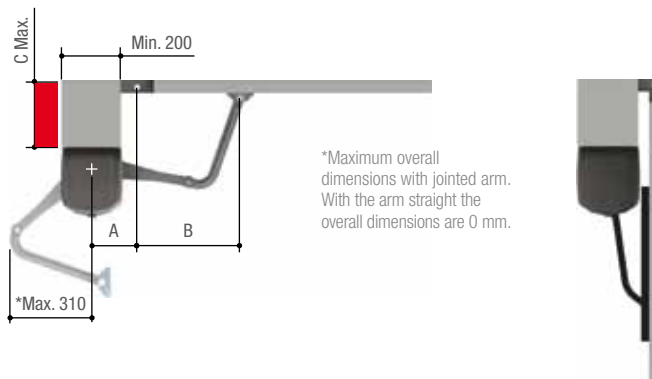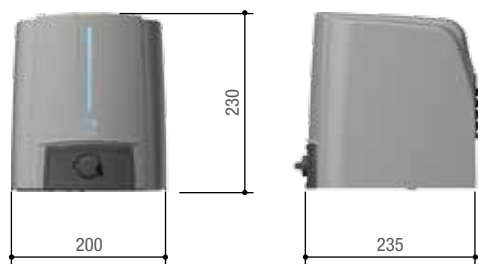

Application dimension (mm)

MODELS	FA40230CB • FA40230 • FA4024CB • FA4024		
GATE LEAF OPENING (°)	A	B	C Max.
90	140	420	200
90	160 ÷ 180	380	200
110	200 ÷ 220	400	50

Benefits become solutions.



NEW PERFORMANCE, HIGH-TECHNOLOGY

- On-board control panel, optimized with control and safety features.
- Mechanical stops, built into the gearmotor, are adjustable for opening and closing to do away with the "jarring stops" of traditional gates.
- Luminous LED to warn when the motor is operating.
- Release lever to ease manual opening of the gate leaf during power outages.

SAFETY... ALWAYS

Safety is ensured even when the gate is idle: every command is cancelled if an obstruction is detected by the safety devices. The encoder-fitted motor makes for easy control of the slow-down phases and obstruction detections. Also, the system runs full self-diagnoses of all safety devices before each movement of the gate. Lastly, the easily reachable release lever, makes it easier to manually open the gate in case of need.

JOINTED OR STRAIGHT ARM

Fast40 adapts to all needs, thanks to its two types of moving arms: the jointed arm, is ideal in traditional post-mounted installations; the straight arm, is indispensable when the lateral space is limited, such as near walls or other obstructions near the gate leaf opening space.



SIMPLICITY AND SAVINGS

The 24 V DC Fast40 features "Sleep Mode" technology to reduce to minimum the consumption of electricity when the motor is idle. Also, it is compatible with the Zero-E solar powered panel, so the gate can work even in areas that are off the municipal power grid.



EN TESTED safety

An electromechanical EN TESTED branded system always ensures safe controlled operation of moving gates, in compliance with current legislative standards in terms of impact forces.



Guaranteed by 24 Volts

Systems running at 24 Volts are super safe to use and very reliable under intense working conditions, such as those found at residential apartment complexes and industrial facilities. Moreover, 24 Volt systems work even during power outages, thanks to the optional batteries.



Read up at came.com about the full range of Came products!

Came is a market leading home, industrial, and special technological projects automation manufacturing company.

A full range of household solutions: from operators for gates and garage doors, to shutter and awning winding motors, and even home automation control, to burglar proof and video entry systems. Technology and reliability to serve your business, thanks to solutions designed for powering large industrial doors, automatic doors, street barriers, turnstiles, access control systems and parking facilities.





CUSTOMIZED ELECTRONICS FOR YOUR NEEDS!

Fast40 is available in the 230 V AC and 24 V DC versions.

The table shows the main control panel characteristics, coupled to the gearmotors.

CONTROL PANEL

	ZF4	ZL94
SAFETY FEATURES		
SELF-DIAGNOSING safety devices	●	●
WAIT obstruction	●	●
PARTIAL STOP	●	●
OBSTRUCTION DETECTED in front of photocells	●	●
Device for CONTROLLING MOVEMENT and DETECTING ANY OBSTRUCTIONS	●	●
CONTROL FEATURES		
PEDESTRIAN OPENING one leaf	●	●
PARTIAL OPENING one leaf	●	●
OPEN ONLY from transmitter and/or button	●	●
OPEN ONLY or CLOSE ONLY button connection	●	●
OPEN-STOP-CLOSE-STOP from transmitter and/or from button	●	●
OPEN-CLOSE-INVERSION from transmitter and/or from button	●	●
MAINTAINED ACTION	●	●
1ST GATE LEAF OPENING DELAY	●	●
2ND GATE LEAF OPENING DELAY	●	●
CHARACTERISTICS AND ADJUSTMENTS		
CYCLE LAMP connection	●	●
COURTESY LAMP connection	●	●
ELECTROLOCK/ELECTROBLOCK and/or ANTI RAMMING connection	●	●
Adjustable AUTOMATIC RECLOSING TIME	●	●
OPENING and/or CLOSING slow down	●	●
EMERGENCY BATTERY operation (optional)	●	●
Adjustable GATE TRAVEL and SLOW DOWN Speeds	●	●

● 230 V AC ● 24 V DC



GARANZIA QUALITÀ ORIGINALE

Came products are entirely designed and made in ITALY



Came S.p.A. is Quality

and Environmentally certified by
UNI EN ISO 9001
UNI EN ISO 14001

MODEL

	FA40230CB • FA40230	FA4024CB • FA4024
Protection rating (IP)	54	5 - 4
Power supply (V - 50/60 Hz)	230 AC	230 AC
Power supply to motor (V - 50/60 Hz)	230 AC	24 DC
Draw (A)	1.4	11 Max.
Power (W)	160	140
Opening time at 90° (s)	18	ADJUSTABLE
Duty cycle (%)	30	INTENSIVE USE
Torque (Nm)	180	180
Operating temperature (°C / °F)	-20 ÷ +55 / -4 ÷ +131	-20 ÷ +55 / -4 ÷ +131
Motor's heat protection (°C / °F)	150 / 302	-

● 230 V AC ● 24 V DC

LIMITS TO USE (MAXIMUM LEAF LENGTH)

	FA40230CB	FA40230	FA4024CB	FA4024
1 m 3.3 ft	300 Kg 661 lb	300 Kg 661 lb	300 Kg 661 lb	300 Kg 661 lb
1.5 m 5 ft	250 Kg 551 lb	250 Kg 551 lb	250 Kg 551 lb	250 Kg 551 lb
2 m 6.6 ft	215 Kg 474 lb	215 Kg 474 lb	215 Kg 474 lb	215 Kg 474 lb
2.3 m 7.5 ft	200 Kg 441 lb	200 Kg 441 lb	200 Kg 441 lb	200 Kg 441 lb

● 230 V AC ● 24 V DC

SOME VERSION MAY NOT BE AVAILABLE IN YOUR COUNTRY. FOR MORE INFORMATION PLEASE CHECK WITH YOUR LOCAL AUTHORIZED DEALER.

Official Partner



MILANO 2015
FEEDING THE PLANET
ENERGY FOR LIFE

© CAME SPA - KDEP#CENOZA3S114 - JAN 2014 - EN

Even partial reproduction is prohibited • Came reserves the right to make any changes to this document at any time



CAME

Came S.p.A.

Via Martiri della Libertà, 15
Dossone di Casier
Treviso - Italy

www.came.com

Came is a company of
CAMEGROUP